




榮獲國內外多項發明及新型專利
It has won multiple inventions and new type patent at home and abroad.



Multiple Functions:
Pulverizing
Bedding
Furrowing
Banking

四大功能

鬆土、作畦、開溝、培土





TS-721A單行式雜糧播種機



TS-721雙行式雜糧播種機

可選購附掛TS-721A單行式或TS-721雙行式播種機，進行雜糧播種作業


It can be installed our type: TS-721A(one-way seeder) or TS-721(two-way seeder) for grain crops seeding.



培土刀逆轉開溝、培土作業
Furrowing and banking with reversal function of the banking blades



雙面犁作畦、起壟、開溝作業
Bedding, ridging and furrowing with ridger

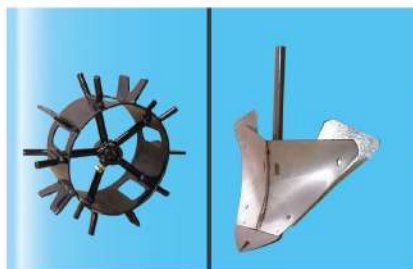

耕作鐵輪
Iron Wheel

雙面犁(推斗)
Ridger



螺旋培土刀
Banking Blades

中耕鬆土刀
Tillage Blades

■人性化設計 / Humanity

1. 耕作鐵輪及耕耘刀皆使用活動插梢固定，方便拆裝變換使用。
To make it easy to be replaced, the tillage iron wheel or blades are set by pins.
2. 最易拆裝的中耕機，縮短保養維修時間。
It provides a gear box disassembled and installed easily; it also shortens the time of maintenance.

■工作效率高 / High Efficiency

1. 多樣化速度選擇：行走部可前進六檔、倒退二檔，耕耘部正、逆轉各一檔。
Speeding Diversification: The power system offers the mode of six speed driving gear and two speed reversing gear. Also, the tillage system offers the mode of one speed driving gear and one speed reversing gear.
2. 耕耘刀具有多種寬度的變化，可進行鬆土、除草、作畦、起壟、開溝、培土等工作。
The tillage blades have many kinds of width. They are suitable for pulverizing, weeding, bedding, ridging, furrowing, and banking.

■使用廣泛性 / Wide-spread Use

1. 適用於菜園、花園、菸園、蔗園、豆園、茶園、果園、雜糧作物區等作業環境。
It is suitable for operating in the fields of flowers, vegetables, tobaccos, beans, sugar canes, tea, fruits, and grain crops.
2. 可加裝大順牌TS-721A單行式播種機、TS-721雙行式播種機，進行雜糧作物播種工作。
It can be installed and added our Type: TS-721A (one-way seeder) or TS-721 (two-way seeder) at the same time for grain crops seeding.

規格表/SPECIFICATIONS (Rubber Wheel/2000rpm)

本表僅供參考/This list is just for references only.

201905

機體尺寸/ Dimension (cm)		L×W×H：148×66×80				
速度 Speed	車輪 Wheel	檔位/ Speed change	1速前進/1st. Fwd.	2速後進/2nd. Rev.	3速前進/3rd. Fwd.	4速前進/4th. Fwd.
		高/ High (km/hr)	5.4	6.9	10.9	5.4
		低/ Low (km/hr)	2.9	3.7	5.9	2.9
	耕 耘 軸 / Rotary axle (rpm)	正轉 / Forward：376		逆轉 / Reverse：604		
作業寬度 / Operating width (cm)		18~36	輪胎規格 / Tire		3.50-5	
作業深度 / Operating depth (cm)		6-30 (視刀具的作業特性而定)		重 量 / Dry weight (kg)		60
操縱把手 / Handle control		上下高度五段調整 / 5 positions adjusting for height				
作業方式 / Mode of operation		刀軸迴轉碎土及作畦器作業 / Breaking land with rotary cutter and operating for plow				
引擎型式 / Engine model		MITSUBISHI GB181L	MITSUBISHI GB221L	MITSUBISHI GB290L	MITSUBISHI GB300L	
引擎馬力 / Output (ps/rpm)		6.3 / 2000	7.0 / 2000	8.0 / 2000	10.0 / 2000	
引擎重量 / Dry weight (kg)		17	19	29	30	



建凱企業股份有限公司
GEN KAI ENTERPRISE CO., LTD.
http://www.cultivator.com.tw

723台南市西港區樣林里太西1號
TEL:(06)7958866 FAX:(06)7961166
E-mail:tagoon@cultivator.com.tw



ISO 9001 : 2008